


Solid - Sponge rubber hatch seals



- Outer : wear resistant solid rubber
- Inner : sponge rubber (ASTM D1056 12A)
- Color : black
- Compression deflection 25% ASTM D1056 5-9 Psi
- Compression set 70°C / 50% deflection ASTM D1056 +/- 15%
- Temperature range °C -20 / + 70

Rectangular profile

Solid-sponge combination

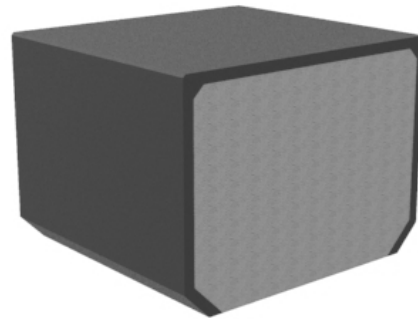

Width	Height
30	20
30	25
35	20
35	25
38	25
38	30
38	38
40	20
50	25
50	30
57	32
60	40
70	32
70	40
